



Product features: Preheating start, power 150W, output current 1000mA, load 1 lamp

## PH8-1000-155 (preheat start)

UV Electronic ballast

### Technical Spec

**Typel: PH8-1000-155 (230)** AC Source: AC220V±20% Article No: 8H2301000155HL

**Typel: PH8-1000-155 (MLT)** AC Source: AC110-220V±10% Article No: 8HMLT1000155HL

Startup mode: Preheat startup, Preheat Time<6-8s.

Input Current: Max.0.67A at 230Vrms Max.1.41A at 110Vrms Mains Frequency: 50/60Hz

Input characteristics: Lightning protection、PF≥0.98、η90%、THD<10、CCF<1.7

Lamp Power: 155W Lamp Power Range: 72-155W Lamp: 1Pcs.

Output Current: 1000mA Output Current Range: 950-1050 mA.

Auxiliary output: lamp light output, DC5V/5mA external LED indication.Feedback information (digital output, dry contact), provide remote control., feedback information

Output Characteristic: Constant current, over voltage, over current, lamp leakage, broken wire, cross, end-of-life protection, etc.

Standard: IP20 Satisfy Adopt CE, UL, CCC.




Working Temperature: -10℃~40℃ Shell temperature: <70℃ Humidity: 5-85%

Shell: aluminum alloy 、American potting technique Size: 250\*64\*56mm<sup>3</sup> Mounting distance: 240mm.

Connection mode: European-style terminal block Distance between ballast and lamp tube<5m.

Package Size: 605\*270\*145mm<sup>3</sup> Net Weight: 0.47KG QTY: 16Pcs Gross Weight: 8KG.

Lamp Type: GPH793T5L/HO、GPH846T5L/HO、GPH893T5L/HO、GPH1000T5L/HO、TL100W、GPH1148T5L/HO、GPH1554T5L/HO、TUV75T5、GHO36T5L、GHO64T5L、TUV95WHOPL-L.

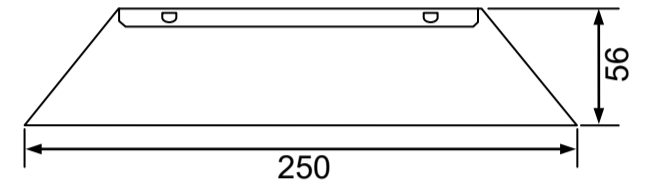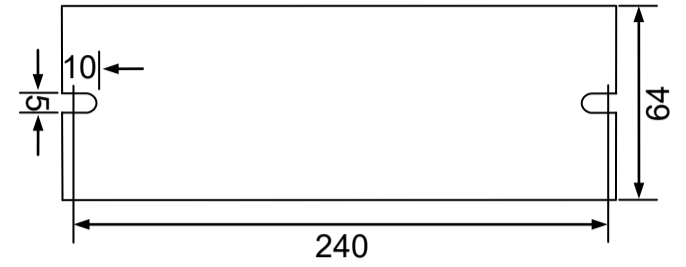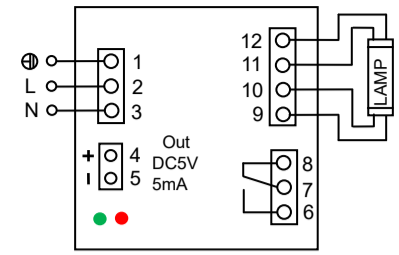

Size: 250\*64\*56mm<sup>3</sup>



Beijing Haoben Electronic Technology Co., LTD  
Address: No. 3, Yard 30, Shixing Street, Shijingshan Park, Zhongguancun Science Park, Beijing  
TEL: 010-68837150 Phone: 13901133015 (Wechat)  
China Haoben Electronic Technology Co., LTD  
Address: No. 261 Wei17 Road, Yueqing Economic Development Zone, Zhejiang Province (National Science and Innovation Center)  
TEL: +86-577-62666315 Phone: +86-18066358678



产品特点: 预热启动, 功率 120W、输出电流 800mA、恒电流输出, 电线输入输出, 负载 1 只灯

## PH8-1000-155 (preheat start)

UV Electronic ballast

### Technical Spec

**Typel: PH8-1000-155 (230)** AC Source: AC220V±20% Article No: 8H2301000155HL

**Typel: PH8-1000-155 (MLT)** AC Source: AC110-220V±10% Article No: 8HMLT1000155HL

Startup mode: Preheat startup, Preheat Time<6-8s.

Input Current: Max.0.67A at 230Vrms Max.1.41A at 110Vrms Mains Frequency: 50/60Hz




Input characteristics: Lightning protection、PF≥0.98、η90%、THD<10、CCF<1.7

Lamp Power: 155W Lamp Power Range: 72-155W Lamp: 1Pcs.

Output Current: 1000mA Output Current Range: 950-1050 mA.

Auxiliary output: lamp light output, DC5V/5mA external LED indication.Feedback information (digital output, dry contact), provide remote control., feedback information

Output Characteristic: Constant current, over voltage, over current, lamp leakage, broken wire, cross, end-of-life protection, etc.

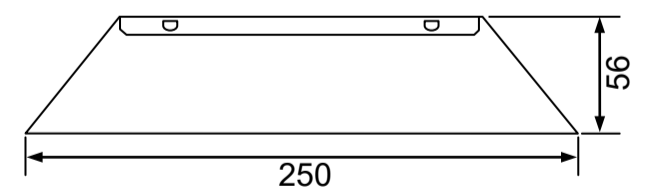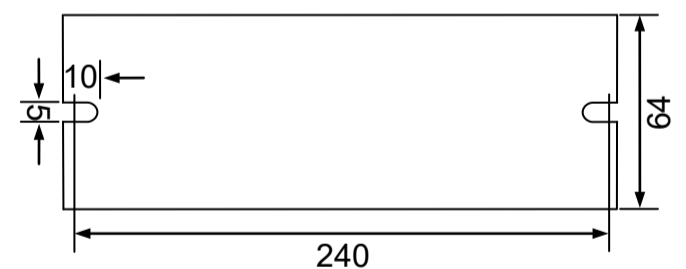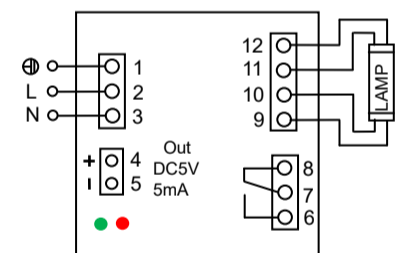

Size: 250\*64\*56mm<sup>3</sup>

